


1040 nm Laser diodes & Turn-key solutions

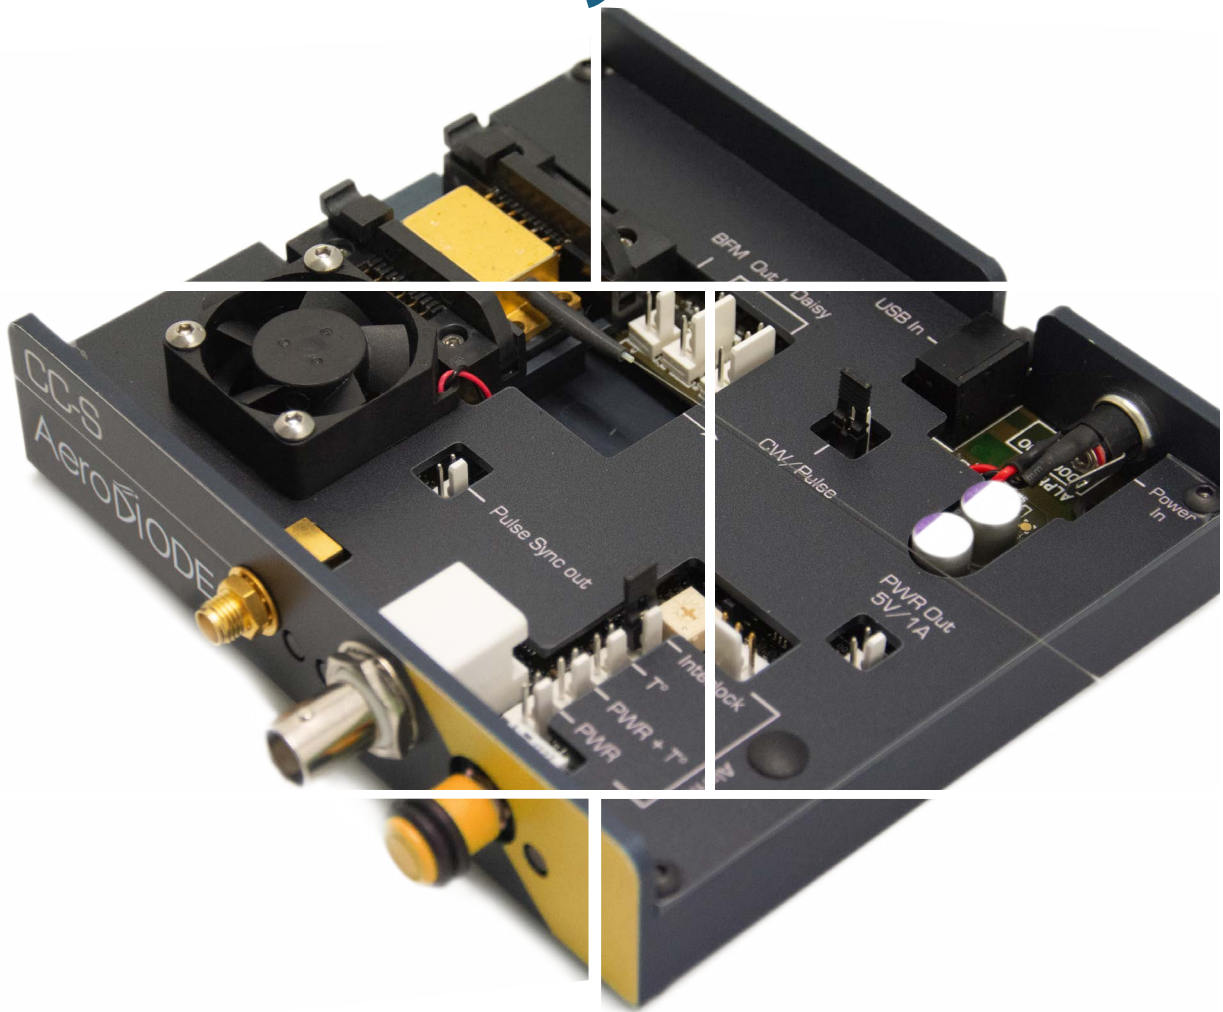

Aero **Di**ODE


1040 nm laser diode

Choose your own fiber-coupled laser diode + turn-key driver solution

Standard singlemode or multimode laser diodes in the 1040 nm wavelength range are offered as stock items or combined with a CW or pulsed turn-key laser diode driver.

1st

Choose your laser diode :

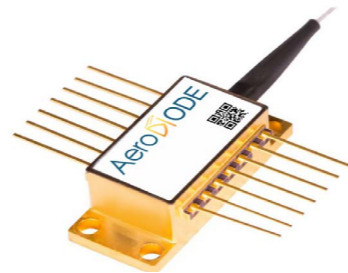


Diode model	Power (CW)	Power (Pulse / typical)	Technology	Wavelength (nm) (Chip Temperature @ 15°C)	Fiber (or eq.)	Emission Bandwidth (typ)	Package (mm)
1	120 mW	800 mW	Butterfly single mode	1040 ± 2 nm (1040 nm ± 0.5 nm with FBG option)	PM 980	~0.5 nm (~0.1 nm with FBG OPTION)	14 pin Butterfly-type 1
2	300 mW	1000 mW		1040 ± 2 nm (1040 nm ± 0.5 nm with FBG option)			

3rd

Choose your product form factor : OPEN-FRAME or INTEGRATED


OPEN-FRAME VERSIONS :

CCS-CW
CCS-std/HP

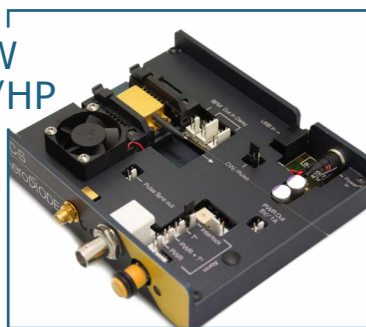


➤ Open-frame driver for CCS-CW, CCS-std and CCS-HP electronics Boards for single mode diodes

SHAPER

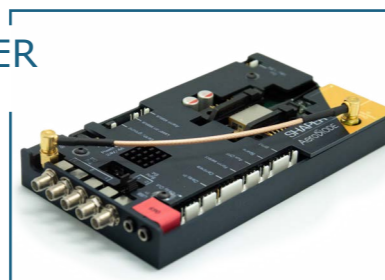

➤ Open-frame driver for «Shaper» electronic Board for single mode diodes

CCM

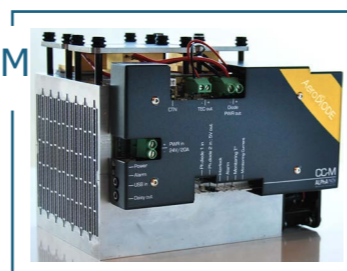

➤ «CCM» Open-frame driver for Multimode diodes

INTEGRATED VERSIONS :

CCSI-CW/
std/HP/HPP



➤ Integrated version for CW, std and HP electronics Boards

SHAPER-I



➤ Integrated version for Shaper electronics Board (single mode diodes)

CCMI



➤ «CCMI» Integrated driver for Multimode diodes



2nd

Choose your Driver performance :



	1040 nm Laser Diode version	LASER DRIVER VERSION :		
		CW Driver (for singlemode diodes : «CCS-CW» is the open driver and CCSI-CW is the integrated version)	Pulse & CW Driver (from 1 ns to CW : «CCS-std» is the open driver and CCSI-std is the integrated version)	User design pulse shape Driver («Shaper» open driver / «Shaper-I» integrated version) from 0.5 ns to 8 μs
Output Power - CW / Pulse (Typical values)	1- Butterfly singlemode	120 mW / No	120 mW / 800 mW	No / 800 mW
		300 mW / No	300 mW / 800 mW	No / 800 mW
Laser diode T°	Any	15 - 50 °C		
Pulse duration (Ext. trigger)		0.5 ns - CW		0.5 ns - 8 μs
Pulse duration (Internal pulse generator)		0.5 ns - 500 ns		
Typ rise/fall time ; Min optical pulse duration (Butterfly package diodes)		3 (ns/A) ; 1.5 ns		< 1ns/A ; 1.5 ns
Internal rep rate adjustment		1 Hz - 4 MHz (250 MHz optional)		1 Hz - 20 MHz
Temporal Jitter		< 25 ps		< 2 ns
Interface/GUI/libraries	USB - Windows 7/10 - DLLs - Hexa/Linux - Labview - Python			

Technical Specifications


GUI (examples)

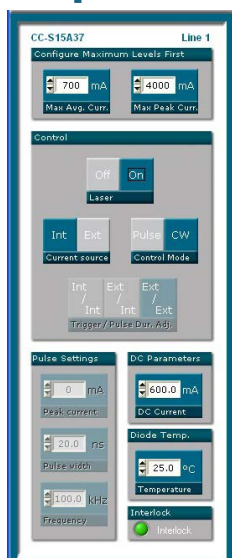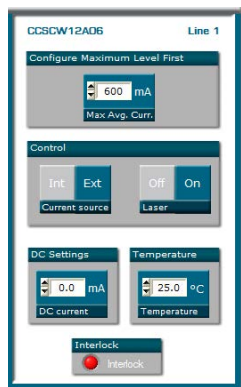

Mechanical (examples) :



CW & Pulsed




SHAPER

OPTIONS (see all prices on the website page) :

- * Narrow spectrum (FBG-based)
- * Optical collimator (3mm or high power 10 mm version)
- * 250 MHz rep rate for pulse diode +driver versions
- * Special Benchtop version for lab use (see the description on the website page and the picture below)



AeroDIODE Multiboard system consolidates all modules functions :

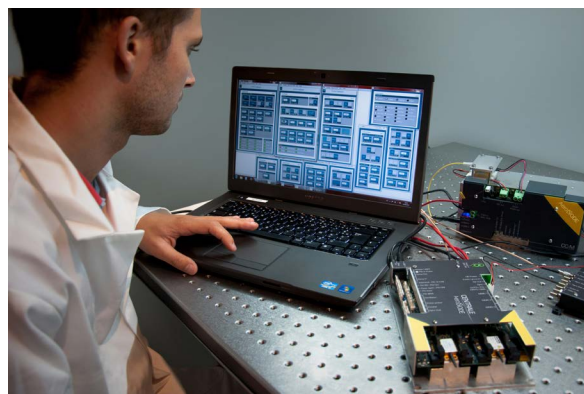

Classification :

Name	1040LD :
Diode type	0: Laser diode only 1: 120 mW Butterfly singlemode 2: 300 mW Butterfly singlemode
Driver Electronics :	0: No driver (laser diode alone) 1: CCS/CCSI-CW (CW laser emission only - for singlemode laser diodes) 2: CCS-CCSI-std (Pulsed and CW Driver - for singlemode laser diodes) 3: SHAPER (User design temporal pulse shape - for singlemode laser diodes) 4, LN, HPP, TDLAS etc : contact us for special driver needs
Form Factor	0: No driver (laser diode alone) 1: Open frame driver version 2: Integrated driver version

Ordering information :

