


981 nm laser diode

Model 5 : 60 W - 105 μ m core fiber

Reference: 981LD-5-0-0

SPECIFICATIONS	Unit	Min	Typ	Maximum
Output Power	W	60.0	-	-
Center Wavelength	nm	980.5	981	981.5
Spectral Width (FWHM)	nm	-	0.7	1
Threshold Current	A	-	1.0	-
Operating Current	A	-	12.0	14.0
Operating Voltage	V	-	11.0	13.0
Wavelength Shift w Temperature	nm/°C	-	0.03	-
Feedback isolation	nm	1020	-	1200
	dB	-	30	-
Slope Efficiency	W/A	-	5.5	-
Fiber connector	SMA905			
Fiber Numerical Aperture	NA	-	0.22	-
Fiber Core Diameter	μ m	-	105	-
Fiber Cladding Diameter	μ m	-	125	-
Fiber tube Diameter	μ m	-	900	-
Minimum Fiber Bend Radius	mm	50	-	-
Operating Temperature	°C	23	25	27
Storage Temperature	°C	-20	-	70
Dimensions	mm	48*80*16		
Mounting holes diameter	mm	$\varnothing$ 3.4		
Soldering Temperature	°C	-	-	260
Soldering time	s	-	-	10
Please solder the pins when the level of current is over 6A.				

Form factor:

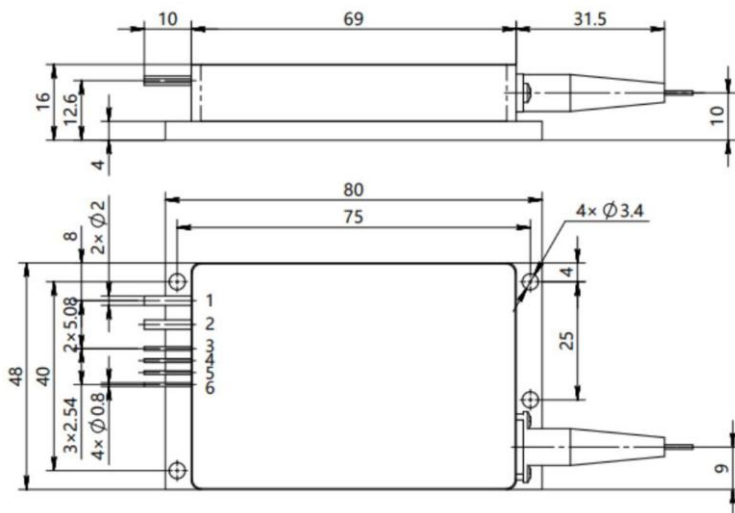

PIN	Function
1	LD (+)
2	LD (-)

