

976 nm laser diode

100 W- 105 μm fiber –NA=0.22*

Special version with broad locking range : 60-100% of nominal power

Reference: 976LD-6-0-0

Technology : Multi emitters with VBG**


SPECIFICATIONS	Unit	Min	Typ	Maximum
Output Power	W	100		
Center Wavelength	nm	975	976	976
Spectral Width (FWHM)	nm			1.0
Threshold Current	A		0.9	
Operating Current	A		12.5	14
Operation Voltage	V		16.0	18
Narrow spectrum emission range	A		7-13	
Wavelength shift w Temperature	nm/°C		0.02	
Wavelength shift w current	nm/W		0.03	
Slope Efficiency	W/A		11	
Feedback isolation	nm	1020		1200
	dB	30		
Storage case Temperature	°C	-20 (abs. min)		70 (abs max)
Operating case temperature	°C	20 (abs min)		30 (abs max)
Fiber Bend Radius	mm	60 (abs min)		
Fiber Buffer/tube Diameter	μm		250/900	
Fiber Clad Diameter	μm		125	
Fiber Core Diameter	μm		105	
Numerical Aperture	NA		0.22*	
Soldering Temperature	°C			260
Soldering time	s			10
Dimensions	mm	80*80*25		
Mounting holes (diam/dist)	mm	Ø3.3 / 74.4*38		
Integrated thermistor		No		
Fiber connector		Yes : SMA905***		

Please solder the pins when the level of current is over 6A

*: Light NA within the fiber is typically much lower - contact us for lower NA fiber version (for example 130W-NA=0.15)

** : Volume Bragg Grating

*** : Fiber connector for handling and space or collimator-coupling- not for SMA-SMA fiber-to-fiber connection

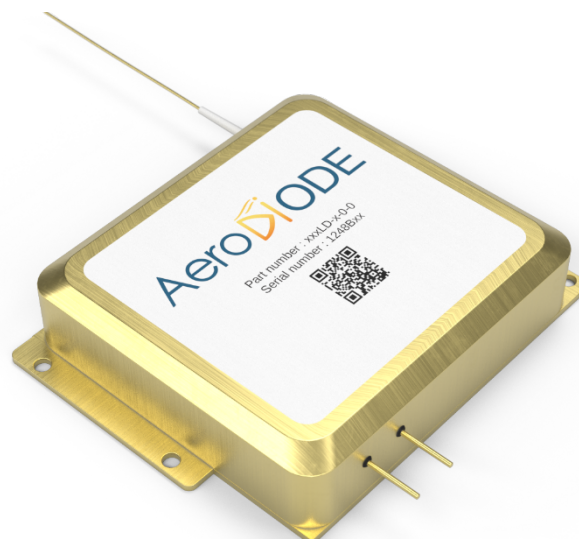

AERODIODE - Institut d'optique d'Aquitaine - Rue François Mitterrand

33400 Talence - France - Tél. : +33 (0)6 27 69 41 52

contact.aerodiode@aerodiode.com - www.aerodiode.com

SIRET 880 329 636 00018 - N° TVA intracommunautaire : FR 87880329636